

Float switch for retention receiver CF30 Series



CF-30



CF-31



- For retention receiver and gutter
- Stem length: from 150 to 2000 mm
- Easy installation
- Output: contact, potential free
- Head housing: IP 54

APPLICATIONS

The float switch CF30 and its variants, are designed to detect a leak from the main tank falling into the retention receiver.

Compatibility with liquids (examples):

- Diesel
- Lubricating oil
- Rainwater
- Water-glycol mixture

As it is a simple controller, much more applications are available.

DESCRIPTION

Against the liquid height, the float lift up a stem actuating a change-over contact.

The fitting allows installation on almost any day-tank or retention receiver. The stem length may be modified on request.

Several versions are available depending on detection heights and mounting:

CF30 Model:

The float is mounted vertically to reduce dimensions.

Distance H: Min. 150 mm

Distance H: Max. 950 mm

Detection from 100 mm of liquid as a minimum (depending of H).

CF31 Model:

The float is mounted horizontally for a detection as soon as possible.

Distance H: Min. 150 mm

Distance H: Max. 2000 mm

Detection from 20 mm of liquid as a minimum (depending of H).

CF32 Model:

Similar to CF30, but with BSP 2" fitting

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

Float switch for retention
receiver
CF30 Series

13-03-2020

D-579.10-EN-AC

NIV

579-10/1

TECHNICAL FEATURES

Materials	Stem: Stainless steel Float: Foamed PVC
Head housing	IP 54
Operating pressure	Atmospheric
Operating temperature	Between 0 and 40 °C
Contact(s)	1 changeover contact, 4 A, 230 V, potential-free <i>Factory setting</i>

CODE NUMBERS AND REFERENCES


Code	Reference	Description	Distance H
579 601	CF30-400	Float switch, vertical float, 400 mm	400 mm
579 611	CF31-165	Float switch, horizontal float, 165 mm	165 mm
579 600	CF30-xxx	Float switch, vertical float, length H on request	150 up to 950 mm
579 610	CF31-xxx	Float switch, horizontal float, length H on request	150 up to 2000 mm
579 615	CF32-xxx	Float switch, vertical float, fitting BSP 2", length H on request	150 up to 950 mm

DIMENSIONS

Dimensional (not to scale)

The diameter and the length of the float vary according to the distance H.

Housing: Horizontal or vertical fitting

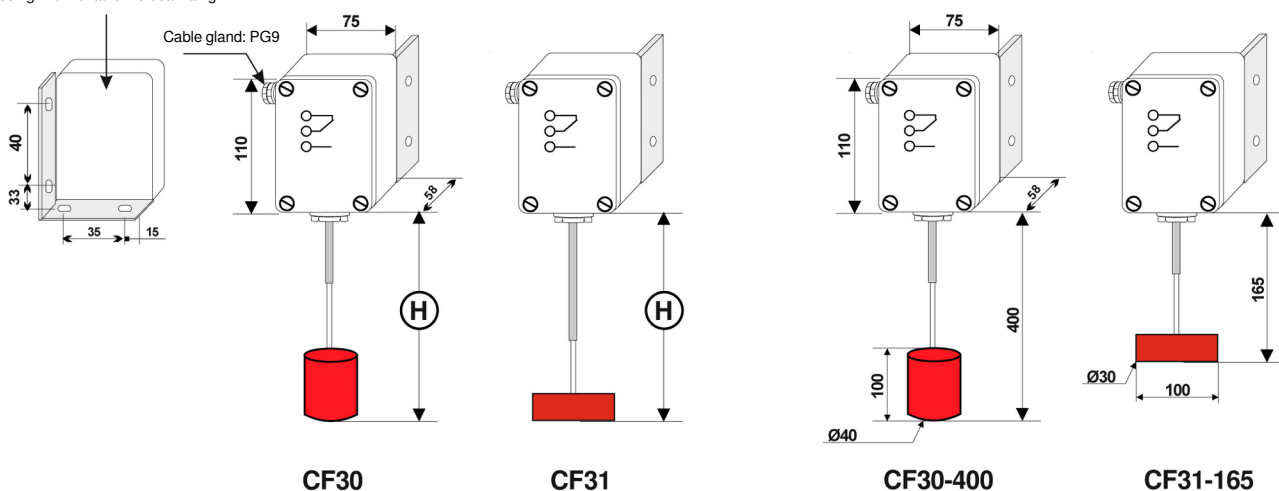

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

Float switch for retention
receiver
CF30 Series

13-03-2020

D-579.10-EN-AC

NIV

579-10/2