

Bulkhead Boom

VIKOMA

Protecting our environment over 50 years



Quality
Reliability
Innovation



Ensuring an effective solution to your oil spill requirements!

- Oil containment boom for emergency and semi permanent deployment
- Designed with independent internal buoyancy chambers
- High strength, flexible neoprene construction
- Excellent wave following and oil containment properties

Tel: +44(0)1983 200560

www.vikoma.com

sales@vikoma.com

For more information on Vikoma containment booms please visit www.vikoma.com

Vikoma's Bulkhead boom offers a high integrity oil containment boom for use in sheltered and open waters. The sealed bulkhead design means that in the unlikely event of one bulkhead being damaged it will be supported by the neighbouring chambers and still contain oil effectively.

The continuous smooth profile, coupled with low inflation pressure give the boom excellent wave following ability which enhances oil containment properties.


Constructed from strong, flexible neoprene the boom can operate in all climates and has a very long service life, with high resistance to abrasion and an excellent resistance to chemicals and environmental damage.

The boom is inflated and deflated via high capacity spring loaded valves located in each buoyancy chamber.

Bulkhead is also available in HD (Heavy Duty) double thickness neoprene fabric. Bulkhead HD is ideal for use in ice or spill situations with heavy floating debris or where there is a likelihood of damage, it is also ideal as a protection barrier boom to prevent smaller craft accessing a restricted area.

Product Benefits:

- Independent internal buoyancy chambers
- High strength, flexible neoprene construction
- Excellent wave following and oil containment properties

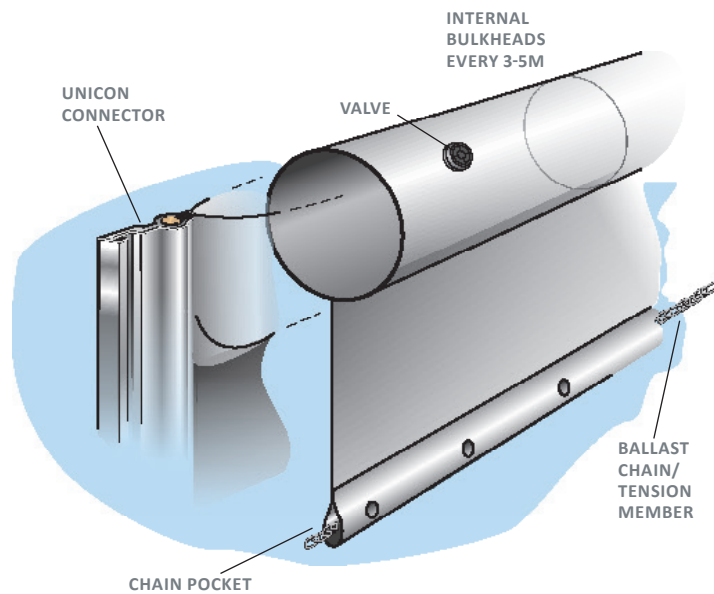

	Application	Height mm (inches)	Freeboard mm (inches)	Draft	Standard Section Lengths
Bulkhead 750, Bulkhead HD 750	Protected Water, Lakes, Coastal, Ports & Harbours	750 (29.5)	350 (13.8)	400 (15.7)	25m 50m
Bulkhead 1000, Bulkhead HD 1000	Open Water, Coastal, Ports & Harbours	1000 (39.6)	350 (15.7)	650 (23.6)	25m 50m
Bulkhead 1200, Bulkhead HD 1200	Open Water, Ports & Harbours, Offshore	1200 (47.2)	500 (19.7)	700 (27.5)	25m 50m
Bulkhead 1500, Bulkhead HD 1500	Open Water, Ports & Harbours, Offshore, Ocean	1500 (59)	600 (23.6)	900 (35.4)	25m 50m